Chemical Engineering Journal 511 (2025) 161785

Contents lists available at ScienceDirect

Chemical Engineering Journal

journal homepage: www.elsevier.com/locate/cej

Corrigendum

Corrigendum to "Spinel-type high-entropy oxides for enhanced oxygen evolution reaction activity in anion exchange membrane water electrolyzers" [Chem. Eng. J. 507 (2025) 160641]

Manuela Montalto [a], Williane da Silva Freitas [a,*], Emanuela Mastronardo [b], Valerio C.A. Ficca [c], Ernesto Placidi [c], Vincenzo Baglio [d], Erminia Mosca [d], Carmelo Lo Vecchio [d], Irene Gatto [d], Barbara Mecheri [a,*], Alessandra D'Epifanio [a]

[a] Department of Chemical Science and Technologies, University of Rome Tor Vergata, Via della Ricerca Scientifica 1, 00133 Rome, Italy
[b] Department of Engineering, University of Messina, C.da di Dio 98166, Messina, Italy
[c] Department of Physics, Sapienza University of Rome, Piazzale Aldo Moro 2, 00185 Rome, Italy
[d] Istituto di Tecnologie Avanzate per l'Energia, Nicola Giordano, CNR-ITAE, Salita Santa Lucia sopra Contesse, 5, 98126 Messina, Italy

The authors regret identifying an error in Fig. 7(d) and Fig. S14 following the publication of the original article. The original version displays incorrect axis units (Ohm instead of Ω cm^2) in both figures. Additionally, in the original Fig. 7(d), the ohmic resistance (Rs) was subtracted from the Nyquist plots, which could confuse readers as this was not specified in the text. The authors hereby provide the corrected versions of Fig. 7(d) and Fig. S14.

Uncorrected Fig. 7(d)

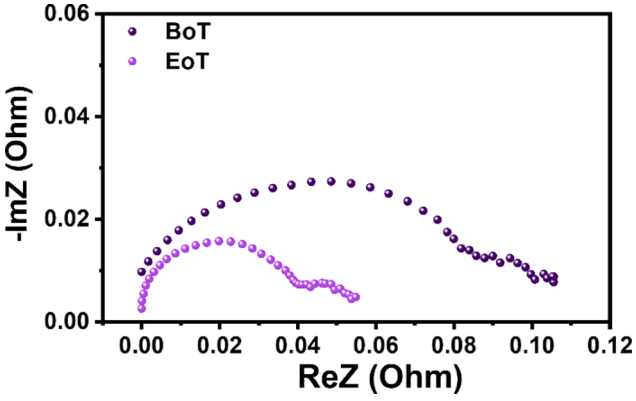

Fig. 7. (d) EIS AEMWE single-cell equipped with the M1H catalyst at the anode and using PiperION® (40 μm tick) membrane.

Corrected Fig. 7(d)

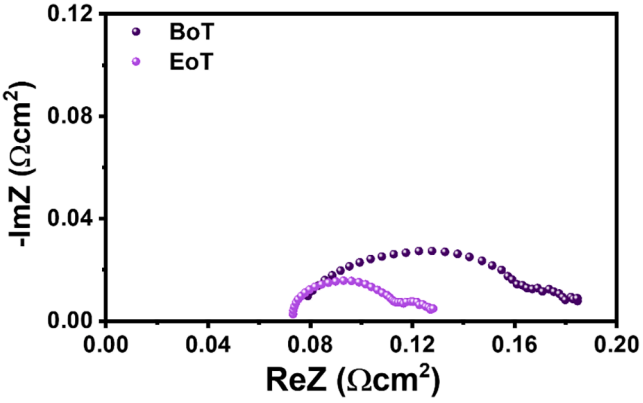

Fig. 7. (d) EIS AEMWE single-cell equipped with the M1H catalyst at the anode and using PiperION® (40 μm tick) membrane.

Uncorrected Fig. S14

DOI of original article: https://doi.org/10.1016/j.cej.2025.160641.
* Corresponding authors.
E-mail addresses: williane.freitas@uniroma2.it (W. da Silva Freitas), barbara.mecheri@uniroma2.it (B. Mecheri).

https://doi.org/10.1016/j.cej.2025.161785

Available online 2 April 2025

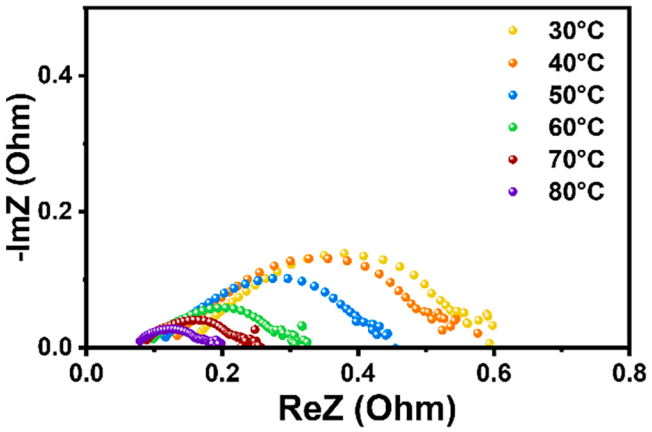

Fig. S14. EIS curves recorded at 1.8 V for a 5 cm^2 AEMWE single cell equipped with the M1H catalyst at the anode and using a PiperION® membrane.

Corrected Fig. S14

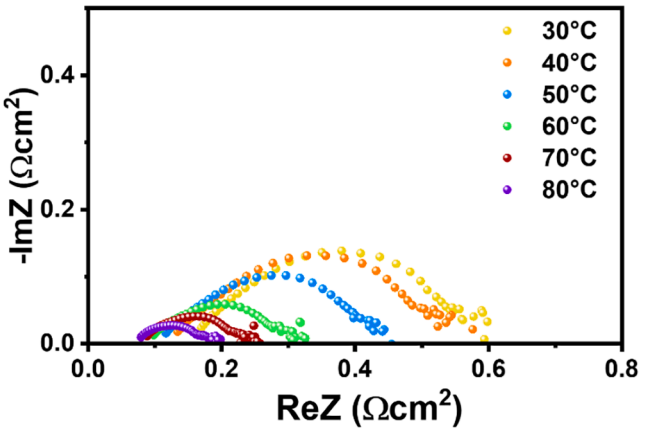

Fig. S14. EIS curves recorded at 1.8 V for a 5 cm^2 AEMWE single cell equipped with the M1H catalyst at the anode and using a PiperION® membrane.

The authors would like to apologise for any inconvenience caused.