

# WIT Transactions on **The Built Environment**

VOLUME 176, 2017



**Urban Transport 2017**

# Urban Transport XXIII

**WIT***PRESS*

WIT Press publishes leading books in Science and Technology.

Visit our website for the current list of titles.

[www.witpress.com](http://www.witpress.com)

**WIT***eLibrary*

Home of the Transactions of the Wessex Institute.

Papers in this volume are archived in the WIT eLibrary in volume 176 of WIT Transactions on the Built Environment (ISSN 1743-3509).

The WIT eLibrary provides the international scientific community with immediate and permanent access to individual papers presented at WIT conferences.

Visit the WIT eLibrary at [www.witpress.com](http://www.witpress.com).

# Urban Transport XXIII

**Editors**

**S. Ricci**

*University of Rome 'La Sapienza', Italy*

**C.A. Brebbia**

*Wessex Institute, UK*

**WIT**PRESS Southampton, Boston



**Editors:**

**S. Ricci**

*University of Rome 'La Sapienza', Italy*

**C.A. Brebbia**

*Wessex Institute, UK*

Published by

**WIT Press**

Ashurst Lodge, Ashurst, Southampton, SO40 7AA, UK

Tel: 44 (0) 238 029 3223; Fax: 44 (0) 238 029 2853

E-Mail: [witpress@witpress.com](mailto:witpress@witpress.com)

<http://www.witpress.com>

For USA, Canada and Mexico

**Computational Mechanics International Inc**

25 Bridge Street, Billerica, MA 01821, USA

Tel: 978 667 5841; Fax: 978 667 7582

E-Mail: [infousa@witpress.com](mailto:infousa@witpress.com)

<http://www.witpress.com>

British Library Cataloguing-in-Publication Data

A Catalogue record for this book is available  
from the British Library

ISBN: 978-1-78466-209-7

eISBN: 978-1-78466-210-3

ISSN: 1746-4498 (print)

ISSN: 1743-3509 (on-line)

*The texts of the papers in this volume were set individually by the authors or under their supervision. Only minor corrections to the text may have been carried out by the publisher.*

No responsibility is assumed by the Publisher, the Editors and Authors for any injury and/or damage to persons or property as a matter of products liability, negligence or otherwise, or from any use or operation of any methods, products, instructions or ideas contained in the material herein. The Publisher does not necessarily endorse the ideas held, or views expressed by the Editors or Authors of the material contained in its publications.

© WIT Press 2018

Printed in Great Britain by Lightning Source, UK.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of the Publisher.

# Contents

## Section 1: Urban strategies

City centre regeneration by removing motorways: impacts on mobility and urban life <i>Elisabeth Redza &amp; Philippe Bouillard</i> .....	3
Supporting cities' emission mitigation strategies: modelling urban transport in a TIMES energy system modelling framework <i>Jonas Forsberg &amp; Anna Krook-Riekkola</i> .....	15
Transportation planning in South Africa: a failure to adjust <i>David Dewar</i> .....	27
Evaluating attitudes on the quality of service of pedestrian networks <i>George Papageorgiou, Athanasios Maimaris, Theofano Efstathiadou &amp; Eudokia Balamou</i> .....	35

## Section 2: Urban transport planning and management

City-port relationships in Malaga, Spain: effects of the new port proposals on urban traffic <i>Alejandro L. Grindlay &amp; Sergio Martínez-Hornos</i> .....	45
Urban transport system analysis <i>Marwa Abouhassan</i> .....	57
The barriers in the implementation process and the operation of innovative urban transport: the case of BRT Jakarta <i>Synthia Angelina, Dirk Vallée &amp; Conny Louen</i> .....	69
Optimization of horizontal highway alignment using a path planner method <i>Sushma Mb &amp; Avijit Maji</i> .....	81

### **Section 3: Public policies and governance**

What are the regulations for ICT-based mobility services in urban transportation systems? The cases of ride-booking regulation in Sao-Paulo and Rio de Janeiro <i>Maxime Audouin &amp; Catarina Neves</i> .....	95
Crisis in governance: unmarked taxis operating in Abidjan, Côte d’Ivoire <i>Zouhoula Bi M. Richard</i> .....	107

### **Section 4: Public transport systems**

Spatial relationships between mobility opportunities and constraints of transport disadvantages: the case of Santiago de Cali, Colombia <i>Alejandro L. Grindlay, Ciro Jaramillo &amp; Carmen Lizárraga</i> .....	119
Choosing between tram and metro in Hong Kong – utility, affect and demographics <i>Wenhan Yang &amp; John Zacharias</i> .....	131
Comparison between bus rapid transit and light-rail transit systems: a multi-criteria decision analysis approach <i>María Eugenia López Lambas, Nadia Giuffrida, Matteo Ignaccolo &amp; Giuseppe Inturri</i> .....	143
Key-cost drivers selection in local public bus transport services through machine learning <i>Alessandro Avenali, Giuseppe Catalano, Tiziana D’Alfonso, Giorgio Matteucci &amp; Andrea Manno</i> .....	155

### **Section 5: Transportation modelling and simulation**

Application of rigid-body numerical simulations for modelling wheel-rail contact interactions and 3D moving load analyses <i>Mohroshan Khan &amp; Satyanarayana Murty Dasaka</i> .....	169
Simulation research on the process of lane change by a motor vehicle steered in an open- and closed-loop system <i>Miroslaw Gidlewski, Leszek Jemioł &amp; Dariusz Żardecki</i> .....	181

### **Section 6: Mobility and public space**

Management of sidewalk maintenance to improve walking comfort for senior citizens <i>Maria Vittoria Corazza, Paola Di Mascio &amp; Laura Moretti</i> .....	195
---------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

Urban mobility and influence factors: a case study of Prague <i>Ladislava Fialka Sobková &amp; Michal Čertický</i> .....	207
-----------------------------------------------------------------------------------------------------------------------------	-----

## **Section 7: Eco-mobility transport systems**

From car to bike: marketing and dialogue as a driver of change <i>Andres Garcia Martinez, Jose Diez, Maria Eugenia Lopez Lambas &amp; Stefano Ricci</i> .....	221
----------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

Developing smart, affordable and sustainable multi-resident housing through solar energy and electric transport integration <i>Neil W. Thompson</i> .....	231
-----------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

An innovative car sharing electric vehicle system: an Italian experience <i>Stefano Carrese, Tommaso Giacchetti, Marialisa Nigro &amp; Sergio Maria Patella</i> .....	245
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

## **Section 8: Infrastructure development**

Sustainable and durable material for pavement construction <i>Romel Nano Georgees, Rayya A. Hassan, Piratheepan Jegatheesan &amp; Robert P. Evans</i> .....	255
--------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

A statistical approach to the estimation of bicycle level of service models for the Cicloruta in Bogota, Colombia <i>Inah Okon, Mark J. G. Brussel, Frans H. M. Van Den Bosch, Carlos A. Moreno &amp; Martin F. A. M. Van Maarseveen</i> .....	265
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

Daylight modelling and analysis reduces installation and operational costs of lighting for tunnel BR 21 in Brisbane, Australia <i>Richard A. Morrison</i> .....	283
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

## **Section 9: Innovations in transport**

Adaptive speed limit for last mile vehicles on public walkways <i>Lutz Kastenbauer, Ruben König, Julia Lay, Lukas Wizemann, Fabian Schmiel &amp; Oliver Zirn</i> .....	295
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

Interpolation and spatial matching method of various public data for building an integrated database <i>Intaek Jung &amp; Kyusoo Chong</i> .....	307
--------------------------------------------------------------------------------------------------------------------------------------------------------	-----

Introducing mobility sharing with automated driving: reducing time and space for parking <i>Hideto Katsuki &amp; Mamoru Taniguchi</i> .....	319
---------------------------------------------------------------------------------------------------------------------------------------------------	-----

## **Section 10: Environmental impact**

Proposed criteria to determine typical vehicular driving cycles using minimum weighted differences <i>Daniel Cordero-Moreno, Danilo Davalos, Mateo Coello &amp; Robert Rockwood</i> .....	329
Monitoring and reducing vehicular impact on air quality at intersections: a case study in China <i>Yun-Pang Flötteröd, Jan Trumpold, Alexander Sohr, Hagen Saul, Fengcheng Wu &amp; Yong Shi</i> .....	339
Application of a methodology for the spatial analysis of air pollutant levels at the Darcy Ribeiro campus of the University of Brasília <i>Rodrigo Oliveira Werneck &amp; Fabiana Serra De Arruda</i> .....	351
Improving reliability of product subjected to random vibration during transportation <i>Seong-Woo Woo</i> .....	361

## **Section 11: Traffic control**

A Finnish road design competition based on the service level method <i>Matti Kiljunen</i> .....	375
Saturation flow estimation at signalized intersections under mixed traffic conditions <i>Arpita Saha, Satish Chandra &amp; Indrajit Ghosh</i> .....	387

## **Section 12: Human factor and railway safety (Special session by F. Jubert)**

Feedback on the human factors awareness campaign related to railway safety at RATP <i>Sofia Chami &amp; Fabrice Jubert</i> .....	397
Human factors in cybersecurity for transportation systems <i>Jean Caire</i> .....	405

## **Section 13: Safety and security**

Collision avoidance system with uni-directional communication for mitigating the adverse effects on following vehicles <i>Sehyun Tak, Donghoun Lee, Seongjin Choi &amp; Hwasoo Yeo</i> .....	417
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----



Effects of ground conditions on whole-body vibration exposure on cars: a case study of drivers of armored vehicles <i>Guido Alfaro Degan, Gianluca Coltrinari, Dario Lippiello &amp; Mario Pinzari</i> .....	431
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

#### **Section 14: Traffic accidents**

Analysis of the seasonal and regional variations in the accident hazard in Poland <i>Leon Prochowski, Hanna Kochanek, Mirosław Gidlewski &amp; Tomasz Pusty</i> .....	441
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

Maintenance priority associated with Powered Two-Wheeler safety <i>Antonella Ragnoli, Maria Vittoria Corazza, Paola Di Mascio &amp; Antonio Musso</i> .....	453
--------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

Influencing factors on vehicle-pedestrian crash severity of school-aged pedestrians <i>Alireza Toran Pour, Sara Moridpour, Richard Tay &amp; Abbas Rajabifard</i> .....	465
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

#### **Section 15: Travel behaviour studies**

Lambert W function based semi-analytical framework for estimation of speed and passenger car unit <i>Subhadip Biswas, Satish Chandra &amp; Indrajit Ghosh</i> .....	479
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

A discrete choice approach to define individual parking choice behaviour for the PARKAGENT model <i>Anum Khaliq, Peter van der Waerden &amp; Davy Janssens</i> .....	493
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----

Segmenting fare evader groups by factor and cluster analysis <i>Sara Salis, Benedetto Barabino &amp; Bruno Useli</i> .....	503
-------------------------------------------------------------------------------------------------------------------------------	-----

Creating a tribal culture of traffic safety <i>Margo L. Hill</i> .....	517
---------------------------------------------------------------------------	-----

Appraising the influence of street patterns on non-motorized travel behaviour in Ahmedabad City, India <i>Ronika Postaria</i> .....	527
-------------------------------------------------------------------------------------------------------------------------------------------	-----

Challenges of using the bus as an older person <i>Andrew Morris, Jo Barnes &amp; Brian Fildes</i> .....	539
------------------------------------------------------------------------------------------------------------	-----

## **Section 16: Railway systems**

Comparison of HSR lines in Turkey and the world and their spatial impact: a case study of the Ankara–Konya HSR line <i>Ahmet Baş &amp; Mehmet Ali Yüzer</i> .....	547
Wear rates in urban rail systems <i>Riccardo Licciardello, Gabriele Malavasi, Stefano Ricci &amp; Pietro Vitali</i> .....	559
<b>Author index</b> .....	571

# MAINTENANCE PRIORITY ASSOCIATED WITH POWERED TWO-WHEELER SAFETY

ANTONELLA RAGNOLI, MARIA VITTORIA CORAZZA, PAOLA DI MASCIO & ANTONIO MUSSO  
Department of Civil, Building and Environmental Engineering, "Sapienza" University of Rome, Italy

## ABSTRACT

Powered Two-Wheelers (PTWs) provide a suitable mode for a large portion of population in many cities due to rider's personal convenience and the vehicle supposed easiness of manoeuvring. At the same time PTWs present serious safety issues compared to other motorized vehicles. This paper reports the main outcome of study carried out in Rome, where this mode is very popular and assesses the economic efforts to make infrastructure safer for PTWs. The methodology, extensively described in the paper, includes three steps: the accident analysis, the development of economic indicators of accidents costs, the maintenance priority. In the first step, the location of the PTWs local accidents are identified, then the accidents are analysed by means of the suitable indicators and, among these the Safety Potential – SAPO. Lastly, according to the results of the analysed indicators the need of infrastructure maintenance will be defined. As usually, SAPO is applied to rural areas, it has been adapted to describe the phenomena of the urban area in hand. As a result, the estimation of the saving potential to improve the infrastructure safety levels, thus reducing the amount of accidents, is presented, along with recommendations on how to upscale the SAPO at city level.

*Keywords: safety, accident costs, Powered Two-Wheelers, maintenance.*

## 1 INTRODUCTION

As a mode of urban transportation, Powered Two-Wheelers (PTWs), i.e. motorcycles, mopeds and scooters, encompass a great variety of vehicles and they are used for a wide range of purposes. Although stricter safety measures for riders have been progressively enforced through the years, PTWs accidents rates are still high worldwide.

According to the 2015 WHO Road Safety Report data [1], the dominance of the mode and the poor compliance to safety requirements contribute in many cases to a high fatality rate. But high PTWs ownership rates, poor enforcement of regulations and controls are significant but not exhaustive explanations to that and for a long time in scientific and grey literature emphasis was also placed on low income levels as additional contributing factors: "Road accidents disproportionately affect the poor, making road safety an economic development imperative. Most of the victims of road accidents aren't even in a motor vehicle. Pedestrians, cyclists and motorcycle riders are the most vulnerable road users and account for the majority of traffic deaths in low and middle income countries" [2].

But in Europe, where PTWs are not the dominant mode, reasons for the accidents national rates must be searched elsewhere. ERSO statistics and others [3], [4], confirms that PTWs motorization rates are higher in the southern areas, as reported in Table 1, where Greece, with 128 mopeds and 142 motorcycles per 1,000 inhabitants, is ranked first. But the very high ownership rates of motorcycles in Switzerland, Germany and Austria or of mopeds in Finland seem to debunk the myth of milder climate as a contributing factor to the PTWs usage.

Table 1 also highlights that the fatality rate generally decreased in the last decade; on the one hand, the progressive enforcement of stricter regulations and controls can be credited for this. But on the other hand, the 2011–2012 overall economic downturn has decreased the sale, and consequently, the fleet of PTW across Europe [5], thus contributing to reduce the role of the mode in the mobility patterns.



Table 1: PTWs fatalities rates in selected European countries, year 2015 [1], [3].

Country	PTWs Motorization rate per 1,000 inh. (units)		Helmet wearing rate (%)		R <sub>d</sub> (%) **	Fatality rate of PTWs riders (event /10 <sup>6</sup> inh.)	
	Moped	Motorcycle	Driv.	Pass.		2005	2014
Austria	35	53	>95 all riders		22	16.9	10.8
Belgium	n.a.	41	99	99	16	14.6	9.1
Czech Rep.*	46	47	95	85	11	12.2	9.1
Finland	57	47	n.a.	n.a.	11	6.9	3.7
France	17	48	98	92	24	20.5	12.7
Germany	25	50	99	99	19	11.9	8.3
Greece	128*	142*	75	46	32	41.7	27.3
Hungary	n.a.	15*	n.a.	n.a.	14	26.9	13
Iceland	9	25	n.a.	n.a.	6	3.4	0.0
Italy	36	109	90 all riders		26	26.0	13.4
Luxembourg	16	31	n.a.	n.a.	18	13.0	14.6
Netherlands	30	39	94-100	84	13	8.2	4.9
Norway	35*	47*	99	99	13	7.6	4.3
Poland	32	31	97 all riders		9	5.5	8.1
Slovenia	20	24	n.a.	n.a.	17	19.0	10.2*
Spain	44	64	99	99	21	18.1	7.3
Switzerland	22	86	96 – 100 all riders		20	12.4	6.6
Sweden	11	32	90 - 97	90 - 97	17	6.0	4.0
UK	1	18	n.a.	n.a.	19	10.0	5.5

\*2013 data.  
\*\* R<sub>d</sub> - Reported dead drivers or passengers of motorized 2- or 3-wheelers (% of all reported road traffic deaths).

Nevertheless, road accidents still take a significant toll on lives every year in Europe, PTW fatalities accounting for 18% of the total number of road deaths in the EU-28 countries in 2013 [6], among them, 15% come from motorcycles and 3% to mopeds fatal crashes. In the same year, if compared to passenger's cars, per 100,000 registered vehicles, the fatalities consisted in respectively 11 deceased motorcyclists versus 5 deceased car occupants [6]. To be noted that motorcycling is the mode of transport for which the number of fatalities decreased least between 2005–2014 [7], as reported in Fig. 1.

Although between 2005–2015 a significant reduction occurred in the PTWs fatality rates in Italy [7], the phenomenon is still far from being negligible (52,920 events in 2014). Highest occurrence is recorded in some of the most populated regions in northern and central Italy, Tuscany, Latium (where Rome is located), Lombardy and Liguria, but fatality rates in percentage are below the national threshold (29.9% of all events). On the contrary, higher fatality rates are equally recorded in northern (Piedmont, Veneto Trentino Alto and Adige, the latter with the highest record: 41% of all the events) and southern regions (Campania and Apulia) [8].

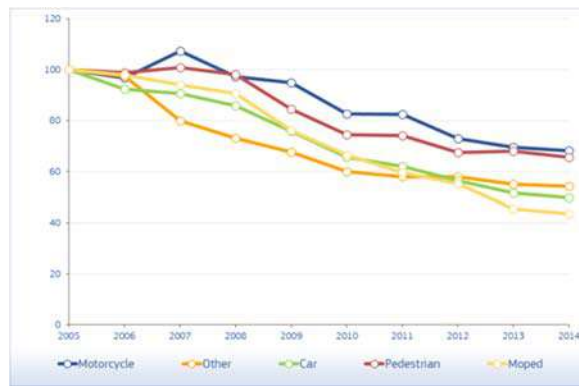


Figure 1: Index (2005=100) of motorcycle and moped fatalities compared with other modes of transport in the EU member states, 2005–2014 [7].

## 2 THE ROME CONTEMPORARY SITUATION

In Italy, PTWs accidents take place mostly in urban areas and Rome is no exception. In this city, the estimated number of two-wheelers is about one for every five inhabitants [9]. PTWs are part of the mobility of everyday life: more than half of the overall number of trips by motorized two-wheelers occurs in a distance range between 2–11 km (just as for passenger’s cars), and even for walking distances (0 to 1 km) the use of PTWs is still an option [10]. This, the high local PTWs number of accidents (Fig. 2) and the high fatality rate (Fig. 3), highlight the importance of appropriate strategies to achieve safer mobility patterns. A focus on accidents occurred between 2010–2012 highlighted that the amount of injured and deceased riders is virtually equal to that of drivers, respectively 42.2% and 43.8% and differences in the locations of accidents can be detected. The central areas and namely the 1st and the 2nd Districts are those where the majority of PTWs accidents occur, as evidenced by the accident density referred to area (Fig. 4, left) and population (Fig. 4, right) of each district.

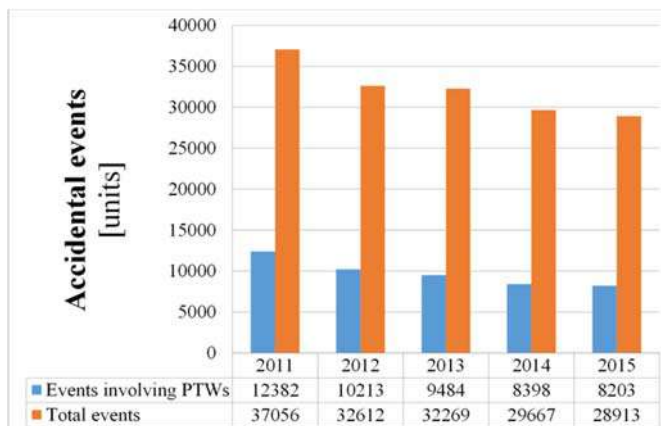


Figure 2: Total number of accidents and the number of PTW’s accidents occurred between 2011 and 2015 in Rome [11].

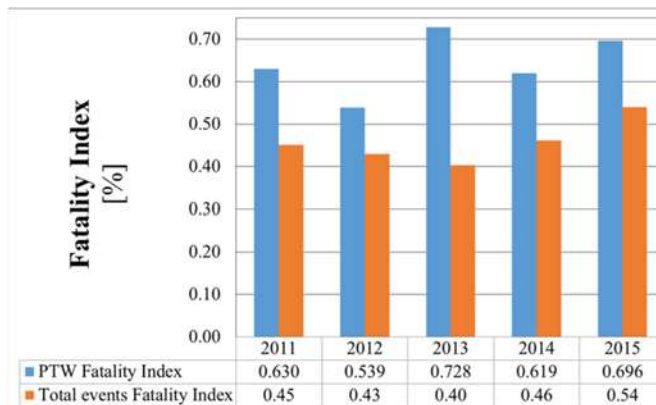


Figure 3: Accidents fatality rate for PTW and the other vehicles [11].

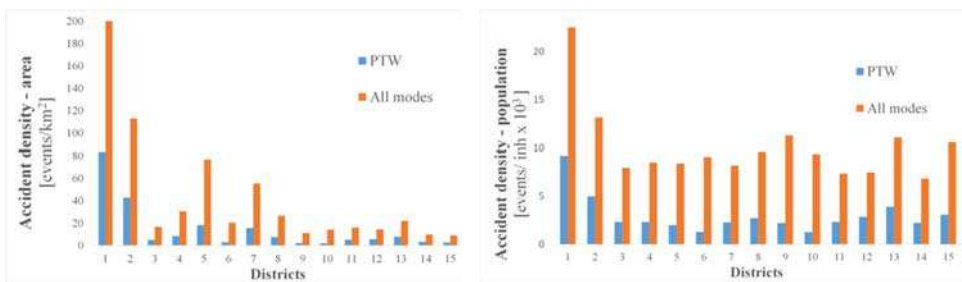


Figure 4: PTW accidents density per district population (left) and area (right) in Rome, 2015.

The two districts are rather different. The 1st District coincides with the city center: a compact setting and unique historic built environment with world-wide famous landmarks and very mixed land use; the area is in part daytimes and night times access-restricted to passenger cars (the so-called Limited Traffic Zone – LTZ), but not to PTWs, and in part pedestrianized.

The 2nd District represents a typical Roman medium-to-high income, high density area, where residential and business activities prevail. The built environment is also high, mostly with low-rise buildings (five stories in average), planted strips and plenty of vegetation, full provision of sidewalks, which make them ideal for walking.

Both districts can be considered valid test fields to analyze PTWs accident trends. A preliminary study on PTWs accidents phenomena was focused on the 1st District [12], but its built environment premium value and sensitive features and the extended LTZ regulation enforced for passenger cars only led to conclusions just partly transferable to the other areas of the city, and in general to other urban areas across Europe where the PTWs role is not negligible.

This is the reason why, the current study was focused on the 2nd District, more similar to many urban districts in Europe, and therefore more generally applicable for the analysis of the PTWs accidents phenomena. The study on a 2nd District main collector, Via Salaria, reported in the next sections serves, as a case in point for assessing recurring problems of

main urban roads with large traffic flows, in spite of their modest capacity (usually due to restricted sections due to the built environment constraints).

### 3 THE METHODOLOGICAL APPROACH

Scientific and grey literature provide a wide array of methods and indicators to assess road safety ([13]–[17] just to mention a few of the most cited references), but virtually all of them have been formulated with generic drivers' behaviours in mind, not PTW riders', or for general environments.

Recent studies for the Rome case [12], [18], assessed the possibility to “customize” the so-called Safety Potential or SAPO index, ( $k€/km*year$ ) to the PTWs events. SAPO was enforced by the Italian “Guidelines on road safety management” (as reported in the National Decree 2.5.2012), as a key indicator within the Network Safety Management (NSM) assessment procedure [19]. NSM provides a dedicated methodology to analyse existing road networks, with the aim to enable road administrations to determine road sections with a poor safety performance. In this frame, SAPO enables to draw a priority list of road links for which is of the utmost importance to intervene to improve safety, by assessing the consequent expected reduction of accidents and costs to these associated.

The Italian regulations also include the calculation of an additional indicator: The Accident Rate  $A_r$ , [20], and consequently this study included both SAPO and  $A_r$  in the assessment of the safety levels along Via Salaria. This road is a typical example of an urban road performing not according to capacity, and thus resulting into an unsafe link in the local network; remarks on the applicability of the method are provided and eventually conclusions on the upscaling of results are drawn.

The analysis was performed considering accident data from 2011–2015 involving PTWs available at the Rome Municipality Open Data Project official databank [11], collected by the police and validated by the Italian Institute of Statistics. For each event, spatial location information and a set of standard alpha-numeric attributes are provided, in order to fully describe operational conditions and circumstances of each accident.

The availability of the spatial information for each accident enables to determine the position of each event along the road, which is represented by a graph, to highlight the relation between accident and road. The associated Geographic Information System (GIS) enabled to create a black spot map (Fig. 5), where PTWs accidents are identified and located and consequently road sections and links with high accident rates highlighted.

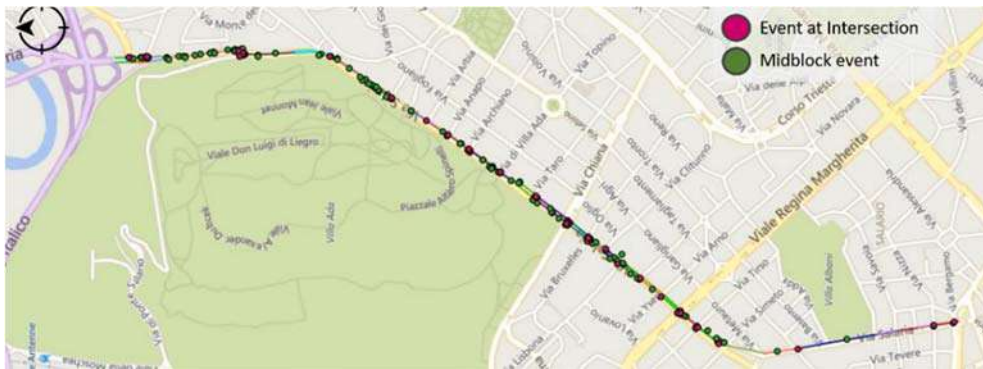


Figure 5: Via Salaria PWT black spot map.

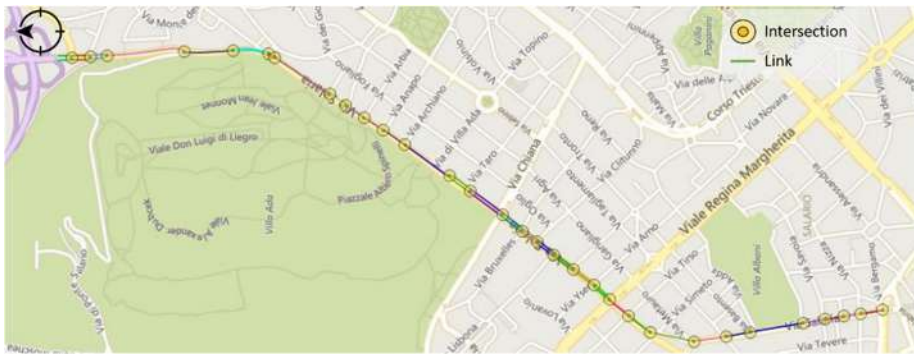


Figure 6: Via Salaria sections, with homogeneous characteristics.

GIS referencing univocally interrelates the event to the closest topological elements of the road graph (links or nodes), by means of an algorithm based on the nearest distance criteria, considering a buffer area of 15 meters from the road axis. The Via Salaria graph analysed was divided into sections, with homogeneous characteristics in term of geometrics features (amount of lanes, types of carriageway, location and amount of intersection) and traffic conditions (average daily traffic flows), as in Fig. 6.

### 3.1 The indicators selection

In order to investigate the accident phenomena along Via Salaria, the above-mentioned indicators, the accident rate  $A_r$ , and the SAPO index, were calculated for each section and node.

$A_r$  (event/veh km) is defined as the number of events occurred on the road section  $i$  during a given period (in years)  $t$ , per the total traffic flow and the road section length.  $A_r$  can be calculated for each considered link as indicated in [20]:

$$A_r = \frac{10^6 \cdot N_i}{365 \cdot l_i \cdot \sum_t ADT_{i,t}} \quad (1)$$

where:

$N_i$  is the amount of events (units)

$l_i$  is the road section length (km)

$ADT_{i,t}$  is the Average Daily Traffic flow.

Similarly, the accident rate  $A_r$  at nodes, i.e. at intersections, can be calculated as:

$$A_r = \frac{10^6 \cdot N_i}{365 \cdot \frac{1}{2} \sum_j ADT_{(i,j),t}} \quad (2)$$

In order to classify the road according to  $A_r$ , the Italian regulations [20]: define two threshold values  $A_{up}$  and  $A_{low}$ , respectively for the upper and lower limits:

$$A_{low} = A_a - K \cdot \sqrt{\frac{A_a}{M_i}} - \frac{1}{2 \cdot M_i} \quad (3)$$

$$A_{up} = A_a + K \cdot \sqrt{\frac{A_a}{M_i}} + \frac{1}{2 \cdot M_i} \quad (4)$$

with  $A_a$  being the Average Accident Rate.



$$A_a = \frac{10^6 \cdot \sum N_i}{365 \cdot \sum_i \sum_t l_i ADT_{i,t}} \quad (5)$$

and

$$M_i = 365 \cdot l_i \cdot \sum_i ADT_{i,t} \text{ (veh/24h)}. \quad (6)$$

$l_i$  being the road section length (km)

$K$  being a constant of the Poisson Distribution ( $K = 1.645$  with a error probability of 10%).

Considering these thresholds, each link and each intersection can be classified as:

- low accident rate if  $A_r < A_{low}$
- medium accident rate if  $A_{low} < A_r < A_{up}$
- high accident rate if  $A_r > A_{up}$

In Fig. 7, the links and the intersections of Via Salaria with a low accident rate are highlighted in green, those with a medium accident rate in yellow and those with a high accident rate in red.

The SAPO index [19], is defined as the accident costs per kilometer of road length (cost density) that could be reduced if a road section would be designed according to accident prevention best practice. The higher the SAPO, the more societal benefits can be expected from improvements on road safety [21].

SAPO can be calculated as:

$$SAPO = ACD - BACD \quad (7)$$

where,  $ACD$  is the average density of accident cost related to the road section or intersection per length, as:

$$ACD = AAC/L \quad (8)$$

with  $L$  being the road section length in km,

$AAC$  being the average annual cost of accident, calculated as the product of number of injuries and fatalities occurred on the road section and the related cost, according to the Italian guidelines to assess social costs related to road accidents [22].

$BACD$  is the Basis Accident Cost Density and represents the expected average annual amount of road accidents per kilometer and per severity levels. It is calculated as:

$$BACD = \frac{BACR \cdot ADT \cdot 365}{10^6}, \quad (9)$$

where  $BACR$  is the Basis Accident Cost Rate which defines different costs for accidents occurred in different types of roads, and related to different types of road users, in this instance the riders in the Via Salaria case study.

Sections eligible for the SAPO calculation were those with at least the occurrence of one event per year. The calculation of SAPO required in this case an adaptation process, being this index designed for general assessment. For example, an initial difficulty in calculating SAPO was to adapt its parameters to the urban context, as SAPO was initially designed to be applied to the Trans-European road Network - TEN according to the European Directive 2008/96 EC, and further recommended for wider applications, including the urban network.

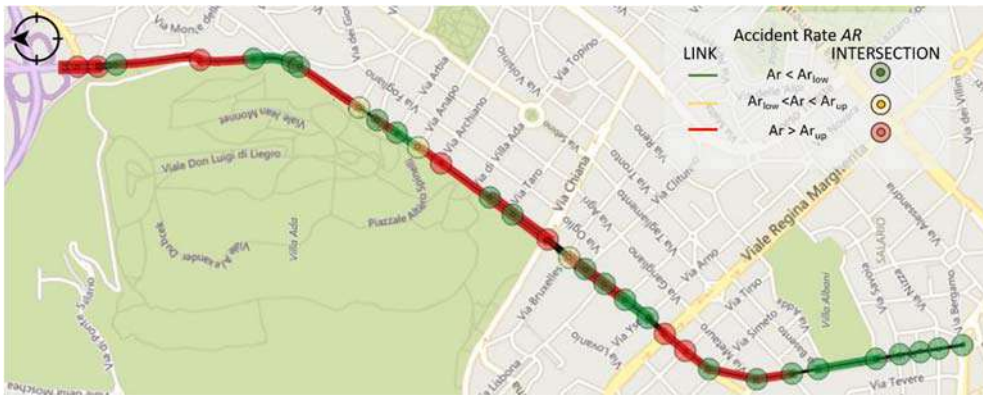


Figure 7: Classification of links and intersections on Via Salaria according to  $A_r$ .

A typical example in translating the application to urban areas, was the difficulty in assessing the appropriate length of road sections: the Italian guidelines recommend 100 m as a minimum, which is appropriate in non-urban environment, but hardly applicable in compact and consolidated city areas. In this case the topographical features of the Via Salaria area suggested to set for this parameter a minimum value of 40 m. Similarly, an adaptation of the BACR parameter was necessary. The accident cost rates in the Italian scientific literature are defined mostly for passenger cars, motorways and rural roads, therefore far from being applicable to Via Salaria. As a reference, a value provided for a comprehensive study on traffic external costs in the Flemish Region [23], seemed the most suitable for the Via Salaria case and therefore used. This study enabled to estimate a cost equal to 400 Euros for each single event occurring on urban roads and involving PTWs.

According to all of the above, SAPO was calculated for the identified sections, which were ranked using a quantile distribution according to a three-class criterion reported in Fig. 8. This proved to be the most suitable for a comparison with  $A_r$ , because it enabled to highlight an average value, comparable to  $A_a$ .

Intersections were assessed through the average annual cost of accident – AAC (in Euro/1000 \*year) calculated as the product of number of injuries and fatalities occurred on the road section and the related base cost, according to the Italian guidelines to assess social costs related to road accidents [19], [22]. Also in this case the accident phenomenon was analysed using a quantile distribution on three classes, in order to provide a priority ranking of interventions based on the expected cost/benefit ratio for each intersection considered.

#### 4 RESULTS

Considering the resulting distribution and the priority ranking of interventions based on the SAPO application, road segments characterized by the highest potential in terms of accident reduction are included in the third tercile.

The analysis shows that the SAPO is more sensitive to the amount of events occurred in the shorter segments. This is the reason why the selection of an appropriate range for the L parameter is of the utmost importance: in this study, the reference value of 40 m proved to be highly suitable to correctly evaluate the accident phenomena in an urban, compact environment.

Figs 8 and 9 show respectively the results of SAPO and  $A_r$  calculated in all the sections of Via Salaria. It is to be noted that the links with the highest SAPO values do not coincide with those with the highest  $A_r$  values. In fact, the two indexes, although complementing each other, provide two different information:  $A_r$  represents the actual accidental phenomena while SAPO represents the prospective benefits coming from a risk mitigation intervention. Fig. 10 shows the scenario resulting from the simultaneous overlap of SAPO and  $A_r$  assessment on Via Salaria, and finally Fig. 11 shows the scenario for Via Salaria also including the rates the intersections are provided with. To prioritize interventions, the combination of SAPO (or AAC) and  $A_r$  was thus considered, as reported in Fig. 12(a), by an Element Safety Ranking Matrix - ESRM. Highest importance is attached to SAPO outcomes because they provide information on the maximum achievable benefits. In the ESRM, elements with both indicators in the red field (as indicated in Fig. 10) are rated as “HIGH”. Lower rates are considered when the SAPO codes are yellow or green. Within the same SAPO class, the intervention priority is set by  $A_r$  level.

The SAPO assessment also provide directions for the mitigation interventions. These should be chosen also considering the mutual connection and the influence between adjacent links and intersections. Therefore, in order to consider the conditions of the adjacent elements, the Network Safety Ranking Matrix - NSRM reported in

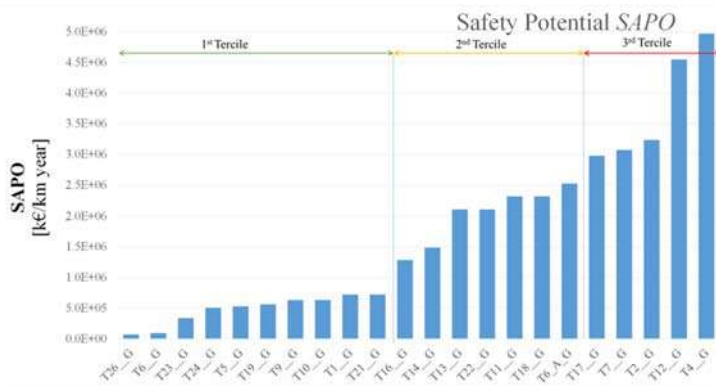


Figure 8: Classification of links on Via Salaria according to SAPO.

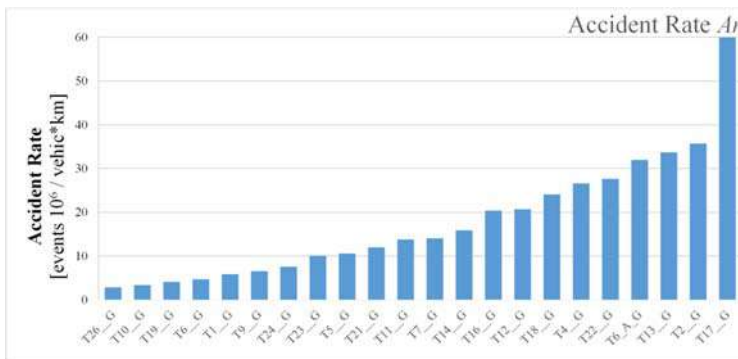


Figure 9: Classification of links on Via Salaria according to  $A_r$ .

Fig. 12(b) was built. The NSRM resumes the significant combinations of links and nodes rating on the road. For each row, links and intersections highlighted in red are those with the highest values of SAPO or AAC, and the combination of at least two red-coded elements ranks as “high” the resulting sections of the road. Likewise, the links and intersections with the yellow codes are those where medium values of SAPO or AAC, and the combination of one or two red-coded elements results into assessing the rate “medium” to the composed sections of the road. The rate “moderate” is associated to sections with just one red element and the rate “low” for the sections with no red elements.

### 5 CONCLUDING REMARKS

SAPO enables to assess different road types, according to different traffic volumes at the same time and therefore contributes to improve accuracy in the analysis of black spots in general. More specifically, in this case it helped detect critical road sections and determine the range of how much could be saved thanks to appropriate interventions. In synergy with  $A_r$  on the links and AAC at the intersections, it improves correctness of analysis.

Furthermore, the case of Via Salaria also suggests the possibility to achieve a reliable assessment of safety costs and extension of mitigating interventions, even when regulatory references are not updated or not comprehensive of specific modes. The case of Via Salaria stresses how parameters such as SAPO, if upscaled, might help understand the size of expenditure for the safety interventions at urban scale and where to intervene first.

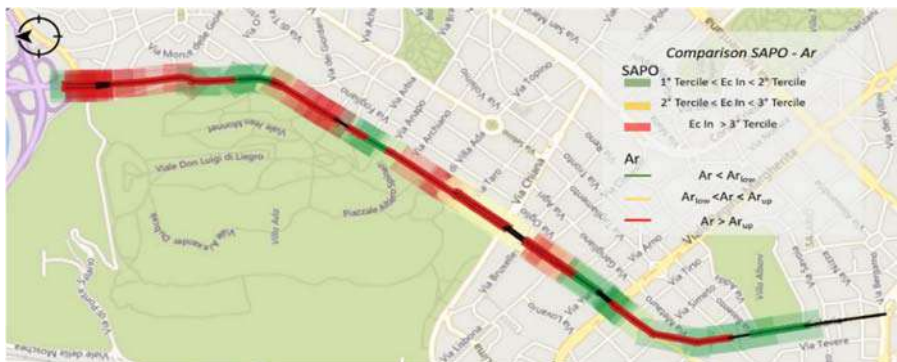


Figure 10: Comparison of SAPO and  $A_r$  calculated on Via Salaria.

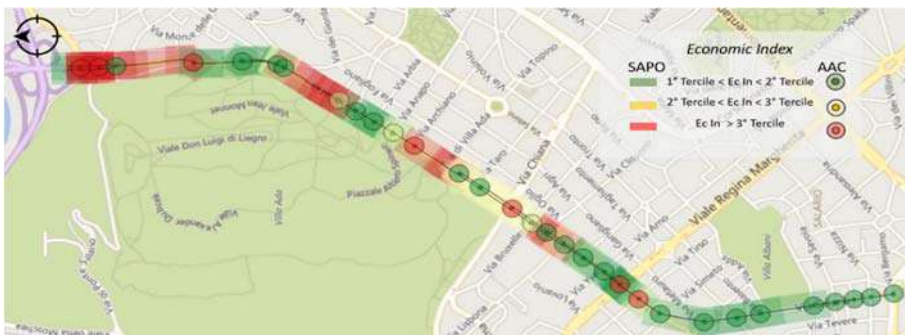


Figure 11: Rating of SAPO on Via Salaria links and AAC at intersections.

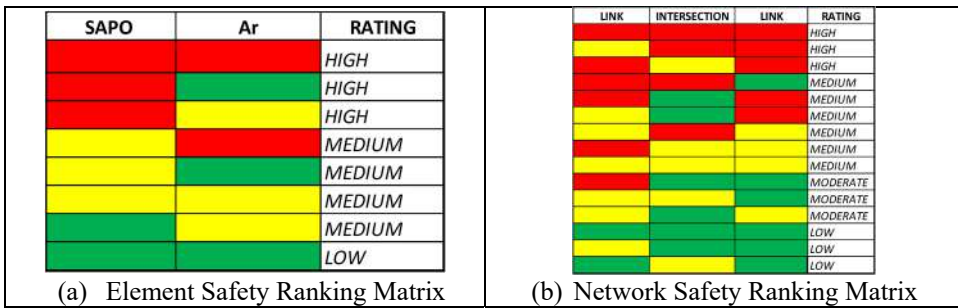


Figure 12: Safety Ranking Matrixes.

Moreover, should the results of the Via Salaria case be upscaled, consequences in terms for a whole reconsideration of PTWs in the city road safety policies will become unavoidable.

This lesson is also valid for all those communities where PTWs, although a dominant or relevant mode in the local modal share, are not properly involved in the local road safety agendas. Needless to say, additional efforts are required also to promote the research towards more specific studies in which parameters and procedures to evaluate PTWs safety conditions can be determined according to advanced analyses and tailored according to the riders’ needs and not derived from general assessment procedures developed for passenger cars.

REFERENCES

- [1] World Health Organization. Global Status Report on Road Safety 2015. Online [http://www.who.int/violence\\_injury\\_prevention/road\\_safety\\_status/2015/en/](http://www.who.int/violence_injury_prevention/road_safety_status/2015/en/), Accessed on: 10 Apr. 2017.
- [2] World Bank (2009), Road Safety: A Development Challenge for South Asia. Online [http://web.worldbank.org/WBSITE/EXTERNAL/COUNTRIES/SOUTHASIAEXT/0 ,contentMDK:20674828~pagePK:146736~piPK:146830~theSitePK:223547,00.html](http://web.worldbank.org/WBSITE/EXTERNAL/COUNTRIES/SOUTHASIAEXT/0,contentMDK:20674828~pagePK:146736~piPK:146830~theSitePK:223547,00.html), Accessed on: 10 Apr. 2017.
- [3] ERSO European Commission, Power Two Wheelers 2015, European Commission, Directorate General for Transport, 2015, Online. [https://ec.europa.eu/transport/road\\_safety/sites/roadsafety/files/ersosynthesis2015-ptw25\\_en.pdf](https://ec.europa.eu/transport/road_safety/sites/roadsafety/files/ersosynthesis2015-ptw25_en.pdf), Accessed on: 10 Apr. 2017.
- [4] Musso, A. & Corazza, M.V., Motorized two-wheelers: contrasting aspect recurring problems and solutions for more comprehensive urban transportation policies, in Proceedings of 12th WCTR Congress, Lisbon 2010, Online <http://www.wctrs-society.com/wp/wp-content/uploads/abstracts/lisbon/selected/01230.pdf>, Accessed on: 10 Apr. 2017.
- [5] International Transport Forum, Improving Road Safety for Motorcycles, Scooter and Moped Riders, OECD, Paris 2015.
- [6] European Commission, Traffic Safety Basic Facts on Motorcycles and mopeds, Directorate General for Transport, Jun. 2015. Online [https://ec.europa.eu/transport/road\\_safety/sites/roadsafety/files/pdf/statistics/dacota/bfs2015\\_motomoped.pdf](https://ec.europa.eu/transport/road_safety/sites/roadsafety/files/pdf/statistics/dacota/bfs2015_motomoped.pdf), Accessed on: 10 Apr. 2017.
- [7] European Commission, Traffic Safety Basic Facts on Motorcycles and mopeds, Directorate General for Transport, Jun. 2016. Online <https://ec.europa.eu/transport/>



- road\_safety/sites/roadsafety/files/pdf/statistics/dacota/bfs2016\_motomoped.pdf, Accessed on: 10 Apr. 2017.
- [8] Automobil Club Italia – ACI, Atlante della Sicurezza Stradale, Dati 2014, Online [http://www.aci.it/fileadmin/documenti/studi\\_e\\_ricerche/dati\\_statistiche/atlante2014/mobile/index.html#p=1](http://www.aci.it/fileadmin/documenti/studi_e_ricerche/dati_statistiche/atlante2014/mobile/index.html#p=1), Accessed on: 10 Apr. 2017.
- [9] Rome Municipality, 2009. Piano Strategico della Mobilità Sostenibile 2009. Online [www.psms.roma.it/](http://www.psms.roma.it/), Accessed on: 2 Mar. 2014.
- [10] ATAC (2006). Rapporto sulla mobilità 2005. Online <http://www.atac.roma.it/>, Accessed on: 2 Mar. 2014.
- [11] Rome Municipality, *Il Progetto Open Data di Roma Capitale*, Online <https://dati.comune.roma.it/> Accessed on: 15 Dec. 2016.
- [12] Corazza, M.V., Musso A., Finikopoulos K. & Sgarra V., An analysis on health care costs due to accidents involving powered two wheelers to increase road safety, *Transportation Research Procedia*, **14**(5), pp. 323–332, 2016.
- [13] Compagne, J., *MAIDS: Motorcycle Accidents In-Depth Study*. ITF, Lillehammer, 2008.
- [14] Elvik, R. et al. *The Handbook of Road Safety Measures*. Bingley, London, 2009.
- [15] Hakkert, A.S. & Gitelman, V., *Road Safety Performance Indicators: Manual D3.8 of the EU FP6 project SafetyNet*, 2007, Online, [http://ec.europa.eu/transport/wcm/road\\_safety/erso/safetynet/fixe/WP3/sn\\_wp3\\_d3p8\\_spi\\_manual.pdf](http://ec.europa.eu/transport/wcm/road_safety/erso/safetynet/fixe/WP3/sn_wp3_d3p8_spi_manual.pdf), Accessed on: 2 Mar. 2014.
- [16] Lamm, R. et al., Safety aspects of individual design elements and their interactions on two-lane highways: International perspective. *Transportation Research Record: Journal of the Transportation Research Board*, **1445**, pp. 34–46, 1994.
- [17] Morsink, P. et al., Development of footprint methodology for road safety. *Transportation Research Record: Journal of the Transportation Research Board*, pp. 104–112, 2007.
- [18] Sgarra V., Di Mascio P., Corazza M.V. & Musso A., An application of ITS devices for powered two-wheelers safety analysis: the Rome case study. In: *Advances in Transportations Studies*, **33**(7), pp. 85–96, 2014.
- [19] Ministero delle Infrastrutture e dei Trasporti. D.M. 2.5.2012. *Linee Guida per la gestione della sicurezza delle infrastrutture stradali*, Supplemento ordinario n. 182 alla Gazzetta Ufficiale, n. 209, 7.9.2012, Istituto Poligrafico dello Stato, Rome, 2012.
- [20] Commissione di studio per le norme relative ai materiali stradali e progettazione, costruzione e manutenzione strade, D.P. CNR N. 13465 del 11/09/1995, *Criteri per la classificazione della rete delle strade esistenti ai sensi dell'art. 13, comma 4 e 5 del nuovo codice della strada - Rapporto finale*, CNR, Rome 1998.
- [21] Nguyen, H.H., Taneerananon, P., Koren, C. & Iamtrakul, P. Safety-potential-based black spot safety management approach: A case study in Ho Chi Minh City. *Journal of the Eastern Asia Society for Transportation Studies*, **10**, pp 1991–2009, 2013.
- [22] Ministero delle Infrastrutture e dei Trasporti, *Studio di valutazione dei costi sociali dell'incidentalità stradale Anno 2011*. Online [http://www.mit.gov.it/mit/mop\\_all.php?p\\_id=12919](http://www.mit.gov.it/mit/mop_all.php?p_id=12919). Accessed on: 2 Mar. 2014.
- [23] Delhay E., De Ceuster G. & Maerivoet S., *Internalisering van externe kosten van transport in Vlaanderen, studie uitgevoerd in opdracht van de Vlaamse Milieumaatschappij*, MIRA, Transport & Mobility, 2010 Leuven. Online [http://www.milieurapport.be/Upload/main/0\\_onderzoeksrapporten/2012/MIRA\\_Extre\\_Kosten\\_Transport\\_TW.pdf](http://www.milieurapport.be/Upload/main/0_onderzoeksrapporten/2012/MIRA_Extre_Kosten_Transport_TW.pdf), Accessed on: 10 Jan. 2017.